


# FHWMPMPAG

## Base Product



Singlemode MPO (Unpinned) to MPO (Unpinned), InstaPATCH® 360 Armored Pre-terminated Trunk Cable, 36-Fiber, Plenum

### OBSOLETE

This product was discontinued on: October 7, 2024

## Product Classification

|                              |  |
|------------------------------|--|
| <b>Regional Availability</b> | Asia   Australia/New Zealand   China   Europe   India   Latin America   Middle East/Africa   North America               |
| <b>Portfolio</b>             | CommScope®   |
| <b>Product Type</b>          | Fiber trunk cable assembly   |
| <b>Product Brand</b>         | SYSTIMAX InstaPATCH® 360   |
| <b>Ordering Note</b>         | For lengths greater than 999 ft (304 m), orders must be in meters   Minimum length may vary based on cable configuration |

## General Specifications


|                                     |                    |
|-------------------------------------|--------------------|
| <b>Color, boot A</b>                | Black              |
| <b>Color, connector A</b>           | Green              |
| <b>Color, boot B</b>                | Black              |
| <b>Color, connector B</b>           | Green              |
| <b>Construction Type</b>            | Armored   Stranded |
| <b>Furcation Color</b>              | Yellow             |
| <b>Interface, Connector A</b>       | MPO-12/APC Female  |
| <b>Interface, Connector B</b>       | MPO-12/APC Female  |
| <b>Jacket Color</b>                 | Yellow             |
| <b>Polarity</b>                     | Method B (LL)      |
| <b>Fibers per Subunit, quantity</b> | 12                 |
| <b>Total Fibers, quantity</b>       | 36                 |

## Dimensions

# FHWMPMPAG

|   |          |
|---|----------|
| <b>Breakout Length</b>                  | 33 in    |
| <b>Cable Assembly Length Range (m)</b>  | 3 – 999  |
| <b>Cable Assembly Length Range (ft)</b> | 10 – 999 |

## Ordering Tree

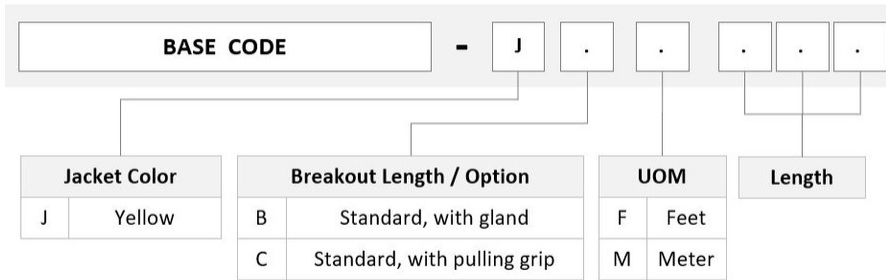

## Mechanical Specifications

|  |                                 |
|--|---------------------------------|
| <b>Cable Retention Strength, maximum</b> | 11.24 lb @ 0 °   4.40 lb @ 90 ° |
|--|---------------------------------|

## Optical Specifications

|                   |                                |
|-------------------|--------------------------------|
| <b>Fiber Mode</b> | Singlemode                     |
| <b>Fiber Type</b> | G.652.D   G.657.A1, TeraSPEED® |

## Environmental Specifications

|                              |                                      |
|------------------------------|--------------------------------------|
| <b>Operating Temperature</b> | -10 °C to +60 °C (+14 °F to +140 °F) |
| <b>Environmental Space</b>   | Indoor   Plenum                      |

## Regulatory Compliance/Certifications

| Agency        | Classification   |
|---------------|--|
| ANATEL        | Compliant  |
| CHINA-ROHS    | Above maximum concentration value  |
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system   |
| REACH-SVHC    | Compliant as per SVHC revision on <a href="http://www.commscope.com/ProductCompliance">www.commscope.com/ProductCompliance</a> |
| ROHS          | Compliant/Exempted   |
| UK-ROHS       | Compliant/Exempted   |

# FHWMPMPAG

---



## Included Products

- 760120147  
P-036-MZ-8W-F12YL - Fiber indoor cable, TeraSPEED® Plenum MPO Trunk, interlocking aluminum armored with plenum jacket, Singlemode G.652.D and G.657.A, 36 fiber multi-unit with 12 fiber subunits, Yellow jacket color, Feet cable marking
- 860366137 - MPO12, LOW LOSS, FEMALE, Singlemode, GREEN, 3mm



Fiber indoor cable, TeraSPEED® Plenum MPO Trunk, interlocking aluminum armored with plenum jacket, Singlemode G.652.D and G.657.A, 36 fiber multi-unit with 12 fiber subunits, Yellow jacket color, Feet cable marking

## Product Classification

|                              |  |
|------------------------------|--|
| <b>Regional Availability</b> | Asia   Australia/New Zealand   Latin America   Middle East /Africa   North America |
| <b>Portfolio</b>             | CommScope®   |
| <b>Product Type</b>          | Fiber indoor cable   |
| <b>Product Series</b>        | P-MZ   |

## General Specifications

|                                     |                       |
|-------------------------------------|-----------------------|
| <b>Armor Type</b>                   | Interlocking aluminum |
| <b>Cable Type</b>                   | MPO trunk cable       |
| <b>Construction Type</b>            | Armored               |
| <b>Subunit Type</b>                 | Gel-free              |
| <b>Jacket Color</b>                 | Yellow                |
| <b>Jacket Marking</b>               | Feet                  |
| <b>Subunit, quantity</b>            | 3                     |
| <b>Fibers per Subunit, quantity</b> | 12                    |
| <b>Total Fiber Count</b>            | 36                    |

## Dimensions

|                                     |                     |
|-------------------------------------|---------------------|
| <b>Buffer Tube/Subunit Diameter</b> | 3 mm   0.118 in     |
| <b>Diameter Over Armor</b>          | 15.88 mm   0.625 in |
| <b>Diameter Over Jacket</b>         | 17.9 mm   0.705 in  |

## Representative Image



## Mechanical Specifications

|  |                                       |
|--|---------------------------------------|
| <b>Minimum Bend Radius, loaded</b>       | 269 mm   10.591 in                    |
| <b>Minimum Bend Radius, unloaded</b>     | 179 mm   7.047 in                     |
| <b>Tensile Load, long term, maximum</b>  | 400 N   89.924 lbf                    |
| <b>Tensile Load, short term, maximum</b> | 1335 N   300.12 lbf                   |
| <b>Compression</b>                       | 85 N/mm   485.363 lb/in               |
| <b>Compression Test Method</b>           | FOTP-41   IEC 60794-1 E3              |
| <b>Flex</b>                              | 300 cycles                            |
| <b>Flex Test Method</b>                  | FOTP-104   IEC 60794-1 E6             |
| <b>Impact</b>                            | 35 N-m   309.776 in lb                |
| <b>Impact Test Method</b>                | FOTP-25   IEC 60794-1 E4              |
| <b>Strain</b>                            | See long and short term tensile loads |
| <b>Strain Test Method</b>                | FOTP-33   IEC 60794-1 E1              |
| <b>Twist</b>                             | 10 cycles                             |
| <b>Twist Test Method</b>                 | FOTP-85   IEC 60794-1 E7              |
| <b>Vertical Rise, maximum</b>            | 159 m   521.654 ft                    |

## Optical Specifications

|                   |  |
|-------------------|--|
| <b>Fiber Type</b> | G.652.D and G.657.A1, TeraSPEED®   OS2   OS2 |
|-------------------|--|

## Environmental Specifications

|                                 |                                    |
|---------------------------------|------------------------------------|
| <b>Installation temperature</b> | 0 °C to +70 °C (+32 °F to +158 °F) |
|---------------------------------|------------------------------------|

# 760120147 | P-036-MZ-8W-F12YL

|                                      |                                       |
|--------------------------------------|---------------------------------------|
| <b>Operating Temperature</b>         | 0 °C to +70 °C (+32 °F to +158 °F)    |
| <b>Storage Temperature</b>           | -40 °C to +70 °C (-40 °F to +158 °F)  |
| <b>Cable Qualification Standards</b> | ANSI/ICEA S-83-596   Telcordia GR-409 |
| <b>Environmental Space</b>           | Plenum                                |
| <b>Flame Test Listing</b>            | NEC OFCP (ETL) and c(ETL)             |
| <b>Flame Test Method</b>             | NFPA 130   NFPA 262                   |

## Environmental Test Specifications

|                                      |                                    |
|--------------------------------------|------------------------------------|
| <b>Heat Age</b>                      | 0 °C to +85 °C (+32 °F to +185 °F) |
| <b>Heat Age Test Method</b>          | IEC 60794-1 F9                     |
| <b>Low High Bend</b>                 | 0 °C to +70 °C (+32 °F to +158 °F) |
| <b>Low High Bend Test Method</b>     | FOTP-37   IEC 60794-1 E11          |
| <b>Temperature Cycle</b>             | 0 °C to +70 °C (+32 °F to +158 °F) |
| <b>Temperature Cycle Test Method</b> | FOTP-3   IEC 60794-1 F1            |

## Packaging and Weights

|                     |                            |
|---------------------|----------------------------|
| <b>Cable weight</b> | 257 kg/km   172.696 lb/kft |
|---------------------|----------------------------|

## Regulatory Compliance/Certifications

| <b>Agency</b> | <b>Classification</b>  |
|---------------|--|
| CHINA-ROHS    | Below maximum concentration value  |
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system   |
| REACH-SVHC    | Compliant as per SVHC revision on <a href="http://www.commscope.com/ProductCompliance">www.commscope.com/ProductCompliance</a> |
| ROHS          | Compliant  |
| UK-ROHS       | Compliant  |




## \* Footnotes

**Operating Temperature** Specification applicable to non-terminated bulk fiber cable

# 860366137

---



MPO12, LOW LOSS, FEMALE, Singlemode, GREEN, 3mm

## Product Classification

|                              |   |
|------------------------------|---|
| <b>Regional Availability</b> | Asia   Australia/New Zealand   EMEA   Latin America   North America |
| <b>Portfolio</b>             | CommScope®  |
| <b>Product Type</b>          | Fiber connector   |
| <b>Product Brand</b>         | TeraSPEED®  |

## General Specifications

|                          |                |
|--------------------------|----------------|
| <b>Color</b>             | Green          |
| <b>Color, boot</b>       | Black          |
| <b>Ferrule Geometry</b>  | Angled         |
| <b>Interface</b>         | MPO/APC Female |
| <b>Interface Feature</b> | Unpinned       |
| <b>Total Fiber Count</b> | 12             |

## Dimensions

|                                  |                    |
|----------------------------------|--------------------|
| <b>Length</b>                    | 60.1 mm   2.366 in |
| <b>Compatible Cable Diameter</b> | 3 mm   0.118 in    |

## Material Specifications

|                         |         |
|-------------------------|---------|
| <b>Ferrule Material</b> | Polymer |
|-------------------------|---------|

## Mechanical Specifications

|  |                |
|--|----------------|
| <b>Cable Retention Strength, maximum</b> | 11.24 lb @ 0 ° |
|--|----------------|

## Optical Specifications

|                                      |  |
|--------------------------------------|--|
| <b>Fiber Mode</b>                    | Singlemode                             |
| <b>Fiber Type</b>                    | G.652.D and G.657.A1, TeraSPEED®   OS2 |
| <b>Insertion Loss Change, mating</b> | 0.3 dB                                 |
| <b>Optical Components Standard</b>   | ANSI/TIA-568-C.3                       |

# 860366137

---

|   |         |
|---|---------|
| <b>Insertion Loss Change, temperature</b> | 0.3 dB  |
| <b>Insertion Loss, maximum</b>            | 0.67 dB |
| <b>Return Loss, minimum</b>               | 55 dB   |

## Packaging and Weights

|                           |   |
|---------------------------|---|
| <b>Packaging quantity</b> | 1 |
|---------------------------|---|

## Regulatory Compliance/Certifications

| <b>Agency</b> | <b>Classification</b>  |
|---------------|--|
| CHINA-ROHS    | Below maximum concentration value  |
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system   |
| REACH-SVHC    | Compliant as per SVHC revision on <a href="http://www.commscope.com/ProductCompliance">www.commscope.com/ProductCompliance</a> |
| ROHS          | Compliant  |
| UK-ROHS       | Compliant  |



## \* Footnotes

|   |   |
|---|---|
| <b>Insertion Loss Change, mating</b>      | TIA-568: Maximum insertion loss change after 500 matings                |
| <b>Insertion Loss Change, temperature</b> | Maximum insertion loss change from -10 °C to +60 °C (+14 °F to +140 °F) |