


FBXSCUC11

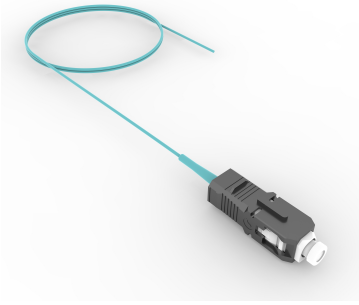

LazrSPEED® 550 SC/UPC to Unconnectorized, Fiber Pigtail, 0.9 mm SBJ

Product Classification

| | |
|------------------------------|--|
| Regional Availability | Asia Australia/New Zealand China Europe India Latin America Middle East/Africa North America |
| Portfolio | CommScope® |
| Product Type | Fiber pigtail, unjacketed |
| Product Brand | SYSTIMAX InstaPATCH® 360 |
| Ordering Note | Minimum length may vary based on cable configuration |

General Specifications


| | |
|-------------------------------|--------|
| Color, boot A | Aqua |
| Color, connector A | Black |
| Interface, Connector A | SC/UPC |
| Jacket Color | Aqua |
| Total Fibers, quantity | 1 |

Dimensions

| | |
|---|--------|
| Cable Assembly Length Range (m) | 1 – 20 |
| Cable Assembly Length Range (ft) | 1 – 66 |

Ordering Tree

FBXSCUC11

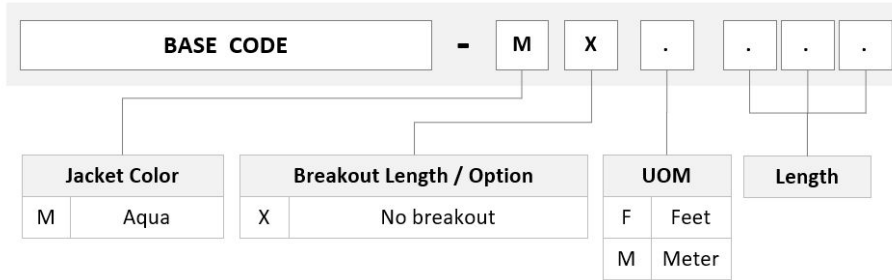

Mechanical Specifications

Cable Retention Strength, maximum 2.00 lb @ 90 ° | 5.00 lb @ 0 °

Optical Specifications

Fiber Mode Multimode

Fiber Type OM4, LazrSPEED®

Environmental Specifications

Operating Temperature -10 °C to +60 °C (+14 °F to +140 °F)

Environmental Space Low Smoke Zero Halogen (LSZH)

Packaging and Weights

Packaging quantity 2

Regulatory Compliance/Certifications

| Agency | Classification |
|---------------|--|
| ANATEL | Compliant |
| CHINA-ROHS | Below maximum concentration value |
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system |
| REACH-SVHC | Compliant as per SVHC revision on www.commscope.com/ProductCompliance |
| ROHS | Compliant |
| UK-ROHS | Compliant |




Included Products

FBXSCUC11

- 760010603
N-001-RF-5K-F09AQ – Fiber Indoor Cable, LazrSPEED® 0.9 mm Low Smoke Zero Halogen Reinforced Buffered, 1 fiber, Multimode OM4, Gel-free, Feet jacket marking, Aqua jacket color
- 860652871 – SC/PC Connector, Multimode, Aqua

760010603 | N-001-RF-5K-F09AQ

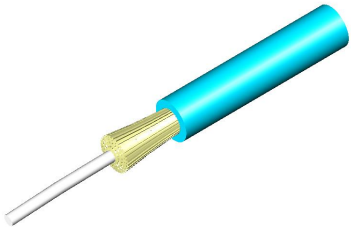

Fiber Indoor Cable, LazrSPEED® 0.9 mm Low Smoke Zero Halogen Reinforced Buffered, 1 fiber, Multimode OM4, Gel-free, Feet jacket marking, Aqua jacket color

Product Classification

| | |
|------------------------------|---|
| Regional Availability | Asia Australia/New Zealand EMEA Latin America North America |
| Portfolio | CommScope® |
| Product Type | Fiber indoor cable |
| Product Series | N-RF |


General Specifications

| | |
|--------------------------|-------------|
| Cable Type | Cordage |
| Construction Type | Non-armored |
| Subunit Type | Gel-free |
| Jacket Color | Aqua |
| Jacket Marking | Feet |
| Total Fiber Count | 1 |

Dimensions

| | |
|-----------------------------|-------------------|
| Diameter Over Jacket | 0.9 mm 0.035 in |
|-----------------------------|-------------------|

Representative Image

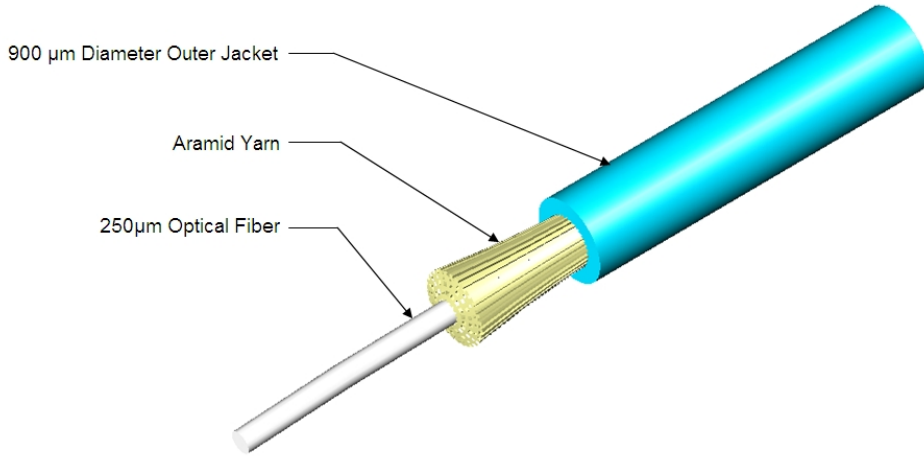

Mechanical Specifications

| | |
|--|---------------------------------------|
| Minimum Bend Radius, loaded | 38 mm 1.496 in |
| Minimum Bend Radius, unloaded | 15 mm 0.591 in |
| Tensile Load, long term, maximum | 20 N 4.496 lbf |
| Tensile Load, short term, maximum | 67 N 15.062 lbf |
| Compression | 10 N/mm 57.101 lb/in |
| Compression Test Method | FOTP-41 IEC 60794-1 E3 |
| Flex | 300 cycles |
| Flex Test Method | FOTP-104 IEC 60794-1 E6 |
| Impact | 0.74 N-m 6.55 in lb |
| Impact Test Method | FOTP-25 IEC 60794-1 E4 |
| Strain | See long and short term tensile loads |
| Strain Test Method | FOTP-33 IEC 60794-1 E1 |
| Twist | 10 cycles |
| Twist Test Method | FOTP-85 IEC 60794-1 E7 |
| Vertical Rise, maximum | 500 m 1,640.42 ft |

Optical Specifications

| | |
|-------------------|---|
| Fiber Type | OM4, LazrSPEED® 550 OM4, bend insensitive |
|-------------------|---|

Environmental Specifications

760010603 | N-001-RF-5K-F09AQ

| | |
|--------------------------------------|---|
| Installation temperature | -10 °C to +50 °C (+14 °F to +122 °F) |
| Operating Temperature | -20 °C to +60 °C (-4 °F to +140 °F) |
| Storage Temperature | -20 °C to +60 °C (-4 °F to +140 °F) |
| Cable Qualification Standards | ANSI/ICEA S-83-596 Telcordia GR-409 |
| Environmental Space | Low Smoke Zero Halogen (LSZH) Riser |
| Flame Test Listing | NEC OFNR-ST1 (ETL) and c(ETL) |
| Flame Test Method | IEC 60332-3 IEC 60754-2 IEC 61034-2 UL 1666 UL 1685 |

Environmental Test Specifications

| | |
|--------------------------------------|-------------------------------------|
| Heat Age | -20 °C to +85 °C (-4 °F to +185 °F) |
| Heat Age Test Method | IEC 60794-1 F9 |
| Low High Bend | -20 °C to +70 °C (-4 °F to +158 °F) |
| Low High Bend Test Method | FOTP-37 IEC 60794-1 E11 |
| Temperature Cycle | -20 °C to +70 °C (-4 °F to +158 °F) |
| Temperature Cycle Test Method | FOTP-3 IEC 60794-1 F1 |

Packaging and Weights

| | |
|---------------------|------------------------|
| Cable weight | 1 kg/km 0.672 lb/kft |
|---------------------|------------------------|

Regulatory Compliance/Certifications

| Agency | Classification |
|---------------|--|
| CHINA-ROHS | Below maximum concentration value |
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system |
| REACH-SVHC | Compliant as per SVHC revision on www.commscope.com/ProductCompliance |
| ROHS | Compliant |
| UK-ROHS | Compliant |



* Footnotes

Operating Temperature Specification applicable to non-terminated bulk fiber cable



SC/PC Connector, Multimode, Aqua

Product Classification

| | |
|------------------------------|---|
| Regional Availability | Asia Australia/New Zealand EMEA Latin America North America |
| Portfolio | CommScope® |
| Product Type | Fiber connector |

General Specifications

| | |
|-----------------------|--------|
| Color, boot | Aqua |
| Color, housing | Black |
| Interface | SC/UPC |

Dimensions

| | |
|----------------------------------|-------------------|
| Length | 42 mm 1.654 in |
| Compatible Cable Diameter | 0.9 mm 0.035 in |

Material Specifications

| | |
|-------------------------|----------|
| Ferrule Material | Zirconia |
|-------------------------|----------|

Mechanical Specifications

| | |
|--|---------------|
| Cable Retention Strength, maximum | 4.40 lb @ 0 ° |
|--|---------------|

Optical Specifications

| | |
|---|---------------------------------|
| Fiber Mode | Multimode |
| Insertion Loss Change, mating | 0.2 dB |
| Optical Components Standard | ANSI/TIA-568. 3-D IEC 61753-1 |
| Insertion Loss Change, temperature | 0.2 dB |
| Insertion Loss, maximum | 0.24 dB |
| Return Loss, minimum | 27 dB |

Regulatory Compliance/Certifications

| Agency | Classification |
|---------------|--|
| CHINA-ROHS | Below maximum concentration value |
| REACH-SVHC | Compliant as per SVHC revision on www.commscope.com/ProductCompliance |
| ROHS | Compliant |
| UK-ROHS | Compliant |



* Footnotes

Insertion Loss Change, mating TIA-568: Maximum insertion loss change after 500 matings

Insertion Loss Change, temperature Maximum insertion loss change from -10 °C to +60 °C (+14 °F to +140 °F)