PPLAGXFLC2PF



Propel ULL Multimode OM4 Cabled Module, 1x24 duplex LC Propel module on End A to 1x24f MPO/UPC non-pinned on End B, 24 fiber Plenum Trunk, Method A

- This component requires 6 of the 12 lanes on the Propel Panel blade
- Ultra-low loss (ULL) with Method A polarity
- End A module can be installed from rear of panel
- Serialized QR code provides easy access to factory optical test results

Product Classification

Regional Availability

Asia | Australia/New Zealand | EMEA | Latin America | North America

Portfolio SYSTIMAX®

Product Type Fiber cabled module

Product Brand Propel
Product Series PPL

Ordering Note For lengths greater than 999 ft (304 m), orders must be in meters | Maximum length is

400 meters

General Specifications

Configuration Type PROPEL Module to MPO Connector

Cable Color Agua

Cable Type Trunk Cable - Plenum

Interface, front LC/UPC

Interface Feature, front Duplex | Shuttered

Interface Color, front Aqua

Interface, rear MPO-24/UPC Female

Interface Feature, rear Key up/down | Unpinned

Module Size, end A 24 fiber

Module Size, end B 24 fiber

Module Quantity, end A 1

Module Quantity, end B 1

Polarity Method A

Total Fibers, quantity 24

COMMSC PE®

PPLAGXFLC2PF

Total Ports, quantity, front 12

Dimensions

 Height
 11 mm | 0.433 in


 Width
 131 mm | 5.157 in

 Depth
 170 mm | 6.693 in

Breakout Length, end B 12 in | 120 in | 33 in | 36 in | 48 in | 60 in | 72 in

Cable Assembly Length Range (m)1-400Cable Assembly Length Range (ft)2-999

Ordering Tree

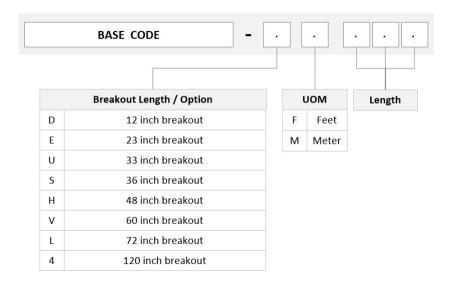

Optical Specifications

Fiber ModeMultimodeFiber TypeOM4Insertion Loss, maximum0.35 dB

Environmental Specifications

Qualification Standards IEC 61753-1 | TIA-568.3-D

Safety Standard c-UL-us

Packaging and Weights

COMMSC PE°

PPLAGXFLC2PF

Packaging quantity

1

Regulatory Compliance/Certifications

Agency Classification

CHINA-ROHS Above maximum concentration value

ROHS Compliant/Exempted UK-ROHS Compliant/Exempted



Included Products

760161919 P-024-MP-5K-F24AQ Fiber indoor cable, LazrSPEED® Plenum for MPO Trunks, 24 fiber, Multimode OM4, Feet jacket marking, Aqua jacket color

