

FFV4-65B-R3-V1



12-port sector antenna, 4x 617-894 and 8x 1695-2690 MHz, 65° HPBW, 3x RET

General Specifications

Antenna Type	Sector
Band	Multiband
Color	Light Gray (RAL 7035)
Grounding Type	RF connector inner conductor and body grounded to reflector and mounting bracket
Performance Note	Outdoor usage Wind loading figures are validated by wind tunnel measurements described in white paper WP-112534-EN
Radome Material	Fiberglass, UV resistant
Radiator Material	Aluminum Low loss circuit board
Reflector Material	Aluminum
RF Connector Interface	4.3-10 Female
RF Connector Location	Bottom
RF Connector Quantity, high band	8
RF Connector Quantity, low band	4
RF Connector Quantity, total	12

Remote Electrical Tilt (RET) Information

RET Interface	8-pin DIN Female 8-pin DIN Male
RET Interface, quantity	1 female 1 male
Input Voltage	10-30 Vdc
Internal RET	High band (2) Low band (1)
Power Consumption, idle state, maximum	1 W
Power Consumption, normal conditions, maximum	10 W
Protocol	3GPP/AISG 2.0 (Single RET)


Dimensions

Width	640 mm 25.197 in
--------------	--------------------

FFV4-65B-R3-V1

Depth	235 mm 9.252 in
Length	1828 mm 71.969 in
Net Weight, without mounting kit	49 kg 108.026 lb

Array Layout

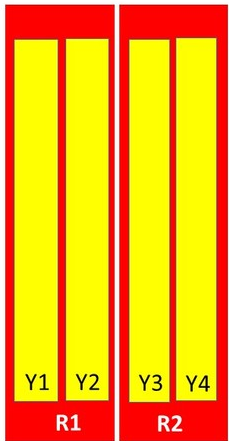


Array	Freq (MHz)	Conns	RET (SRET)	AISG RET UID
R1	617-894	1-2	1	ANxxxxxxxxxxxxxxxxx1
R2	617-894	3-4		
Y1	1695-2690	5-6	2	ANxxxxxxxxxxxxxxxxx2
Y2	1695-2690	7-8		
Y3	1695-2690	9-10	3	ANxxxxxxxxxxxxxxxxx3
Y4	1695-2690	11-12		

Left Bottom Right

(Sizes of colored boxes are not true depictions of array sizes)

Port Configuration

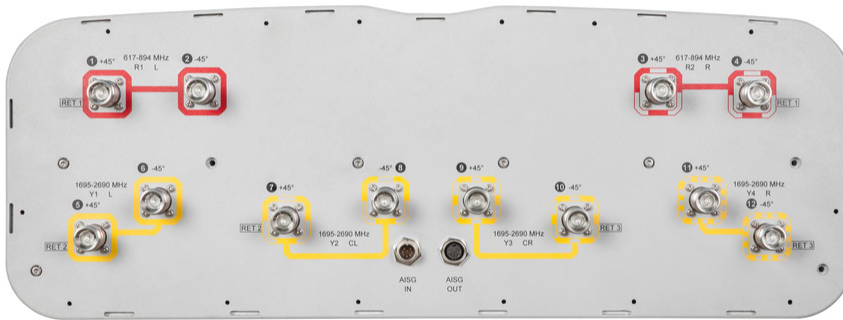

FFV4-65B-R3-V1

Electrical Specifications

Impedance	50 ohm
Operating Frequency Band	1695 – 2690 MHz 617 – 894 MHz
Polarization	±45°
Total Input Power, maximum	900 W @ 50 °C

Electrical Specifications

Frequency Band, MHz	617–698	698–894	1695–1880	1850–1990	1920–2200	2300–2500	2500–2690
Gain, dBi	14.4	14.7	17.6	18	18.4	18.4	19
Beamwidth, Horizontal, degrees	61	59	63	61	61	59	59
Beamwidth, Vertical, degrees	14.6	12.4	5.6	5.3	5.1	4.5	4.1
Beam Tilt, degrees	2–14	2–14	2–12	2–12	2–12	2–12	2–12
USLS (First Lobe), dB	20	20	20	19	20	20	19
Front-to-Back Ratio at 180°, dB	29	33	35	33	30	31	31
Isolation, Cross Polarization, dB	25	25	25	25	25	25	25
Isolation, Inter-band, dB	28	28	28	28	28	28	28
VSWR Return loss, dB	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0
PIM, 3rd Order, 2 x 20 W, dBc	-150	-153	-153	-153	-153	-153	-153
Input Power per Port at 50°C, maximum, watts	250	250	200	200	200	200	200

Electrical Specifications, BASTA

Frequency Band, MHz	617–698	698–894	1695–1880	1850–1990	1920–2200	2300–2500	2500–2690
Gain by all Beam Tilts, average, dBi	14	14.3	17.2	17.6	17.9	18.1	18.4
Gain by all Beam Tilts Tolerance, dB	±0.4	±0.5	±0.5	±0.4	±0.6	±0.5	±0.5
Gain by Beam Tilt, average, dBi	2° 14.1 8° 14.0 14° 13.8	2° 14.5 8° 14.4 14° 14.0	2° 17.2 7° 17.3 12° 17.1	2° 17.5 7° 17.7 12° 17.5	2° 17.6 7° 18.0 12° 18.0	2° 17.9 7° 18.3 12° 17.8	2° 18.2 7° 18.7 12° 18.2
Beamwidth, Horizontal Tolerance, degrees	±4.2	±4.8	±3.6	±4.4	±5.5	±6.2	±8.3
Beamwidth, Vertical Tolerance, degrees	±1.2	±1.4	±0.3	±0.3	±0.4	±0.2	±0.2
USLS, beampeak to 20° above	21	19	14	15	17	16	15

FFV4-65B-R3-V1

beampeak, dB

Front-to-Back Total Power at 180° ± 30°, dB	21	22	27	27	24	25	25
CPR at Boresight, dB	16	16	19	21	19	17	21
CPR at Sector, dB	8	8	6	6	5	5	7

Mechanical Specifications

Effective Projective Area (EPA), frontal	0.72 m ² 7.75 ft ²
Effective Projective Area (EPA), lateral	0.24 m ² 2.583 ft ²
Mechanical Tilt Range	0°–15°
Wind Loading @ Velocity, frontal	765.0 N @ 150 km/h (172.0 lbf @ 150 km/h)
Wind Loading @ Velocity, lateral	251.0 N @ 150 km/h (56.4 lbf @ 150 km/h)
Wind Loading @ Velocity, maximum	1,041.0 N @ 150 km/h (234.0 lbf @ 150 km/h)
Wind Loading @ Velocity, rear	788.0 N @ 150 km/h (177.1 lbf @ 150 km/h)
Wind Speed, maximum	241 km/h (150 mph)

Packaging and Weights

Width, packed	752 mm 29.606 in
Depth, packed	387 mm 15.236 in
Length, packed	1982 mm 78.032 in
Weight, gross	67 kg 147.71 lb

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS	Compliant
UK-ROHS	Compliant/Exempted



Included Products

BSAMNT-4	–	Wide Profile Antenna Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set.
----------	---	--

FFV4-65B-R3-V1

* Footnotes

Performance Note Severe environmental conditions may degrade optimum performance

BSAMNT-4



Wide Profile Antenna Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set.

Product Classification

Product Type Downtilt mounting kit

General Specifications

Application Outdoor

Color Silver

Dimensions

Compatible Diameter, maximum 115 mm | 4.528 in

Compatible Diameter, minimum 60 mm | 2.362 in

Weight, net 6.5 kg | 14.33 lb

Material Specifications

Material Type Galvanized steel

Packaging and Weights

Included Brackets | Hardware

Packaging quantity 1

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS	Compliant
UK-ROHS	Compliant

