

NNHH-45B-R4-V1



8-port sector antenna, 4x 698–896 and 4x 1695–2360 MHz, 45° HPBW, 4x RET

- Interleaved dipole technology providing for attractive, low wind load mechanical package
- The antenna is supplied with mounting kits that provide 0 degree of mechanical downtilt; optional downtilt mounting kits are available

General Specifications

Antenna Type	Sector
Band	Multiband
Grounding Type	RF connector inner conductor and body grounded to reflector and mounting bracket
Performance Note	Outdoor usage Wind loading figures are validated by wind tunnel measurements described in white paper WP-112534-EN
Radome Material	Fiberglass, UV resistant
Radiator Material	Aluminum Low loss circuit board
Reflector Material	Aluminum
RF Connector Interface	4.3-10 Female
RF Connector Location	Bottom
RF Connector Quantity, high band	0
RF Connector Quantity, mid band	4
RF Connector Quantity, low band	4
RF Connector Quantity, total	8

Remote Electrical Tilt (RET) Information


RET Hardware	CommRET v2
RET Interface	8-pin DIN Female 8-pin DIN Male
RET Interface, quantity	1 female 1 male
Input Voltage	10–30 Vdc
Internal RET	Low band (2) Mid band (2)
Power Consumption, active state, maximum	8 W
Power Consumption, idle state, maximum	1 W
Protocol	3GPP/AISG 2.0 (Single RET)

NNHH-45B-R4-V1

Dimensions

Width	457 mm 17.992 in
Depth	178 mm 7.008 in
Length	1848 mm 72.756 in
Net Weight, antenna only	34.5 kg 76.059 lb

Array Layout

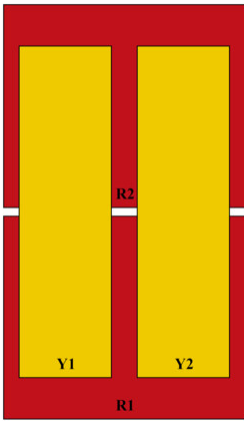

ArrayID	Frequency(MHz)	RF Connector	RET (SRET)	AISG No.	RET UID
R1	698-896	1 - 2	1	AISG1	CPxxxxxxxxxxxxR1
R2	698-896	3 - 4	2	AISG1	CPxxxxxxxxxxxxR2
Y1	1695-2360	5 - 6	3	AISG1	CPxxxxxxxxxxxxY1
Y2	1695-2360	7 - 8	4	AISG1	CPxxxxxxxxxxxxY2

(Sizes of colored boxes are not true depictions of array sizes)

Port Configuration



NNHH-45B-R4-V1

Electrical Specifications

Impedance	50 ohm
Operating Frequency Band	1695 – 2360 MHz 698 – 896 MHz
Polarization	±45°
Total Input Power, maximum	900 W @ 50 °C

Electrical Specifications

Frequency Band, MHz	698–806	806–896	1695–1880	1850–1990	1920–2180	2300–2360
RF Port	1-4	1-4	5-8	5-8	5-8	5-8
Gain, dBi	14	14.9	19.4	20	20.5	21
Beamwidth, Horizontal, degrees	49	42	45	43	41	38
Beamwidth, Vertical, degrees	24.4	21.6	5.9	5.5	5.1	4.6
Beam Tilt, degrees	2–18	2–18	2–12	2–12	2–12	2–12
USLS (First Lobe), dB	18	19	14	15	15	17
Front-to-Back Ratio at 180°, dB	32	34	35	37	39	38
Isolation, Cross Polarization, dB	25	25	25	25	25	25
Isolation, Inter-band, dB	25	25	25	25	25	25
VSWR Return loss, dB	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0
PIM, 3rd Order, 2 x 20 W, dBc	-153	-153	-153	-153	-153	-153
Input Power per Port at 50°C, maximum, watts	300	300	300	300	300	250

Mechanical Specifications

Effective Projective Area (EPA), frontal	1.01 m ² 10.872 ft ²
Effective Projective Area (EPA), lateral	0.21 m ² 2.26 ft ²
Wind Loading @ Velocity, frontal	1,077.0 N @ 150 km/h (242.1 lbf @ 150 km/h)
Wind Loading @ Velocity, lateral	222.0 N @ 150 km/h (49.9 lbf @ 150 km/h)
Wind Loading @ Velocity, maximum	1,077.0 N @ 150 km/h (242.1 lbf @ 150 km/h)
Wind Loading @ Velocity, rear	946.0 N @ 150 km/h (212.7 lbf @ 150 km/h)
Wind Speed, maximum	241 km/h (150 mph)

Packaging and Weights

NNHH-45B-R4-V1

Width, packed	526 mm 20.709 in
Depth, packed	283 mm 11.142 in
Length, packed	2015 mm 79.331 in
Weight, gross	47.4 kg 104.499 lb

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Above maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
ROHS	Compliant/Exempted
UK-ROHS	Compliant/Exempted



Included Products

BSAMNT-3F	-	Mounting bracket for cylindrical pipe installations (60-115mm pipe diameter) for fix mechanical tilt applications.
-----------	---	--

* Footnotes

Performance Note	Severe environmental conditions may degrade optimum performance
-------------------------	---